

Signals in the Rhodesian Bush War



1966 -1980

Dr Brian Austin

THIRTY FIVE CENTS

NOVEMBER 5, 1965

THE WHITE MAN IN BLACK AFRICA


TIME

THE WEEKLY NEWSMAGAZINE



RHODESIA'S
IAN SMITH




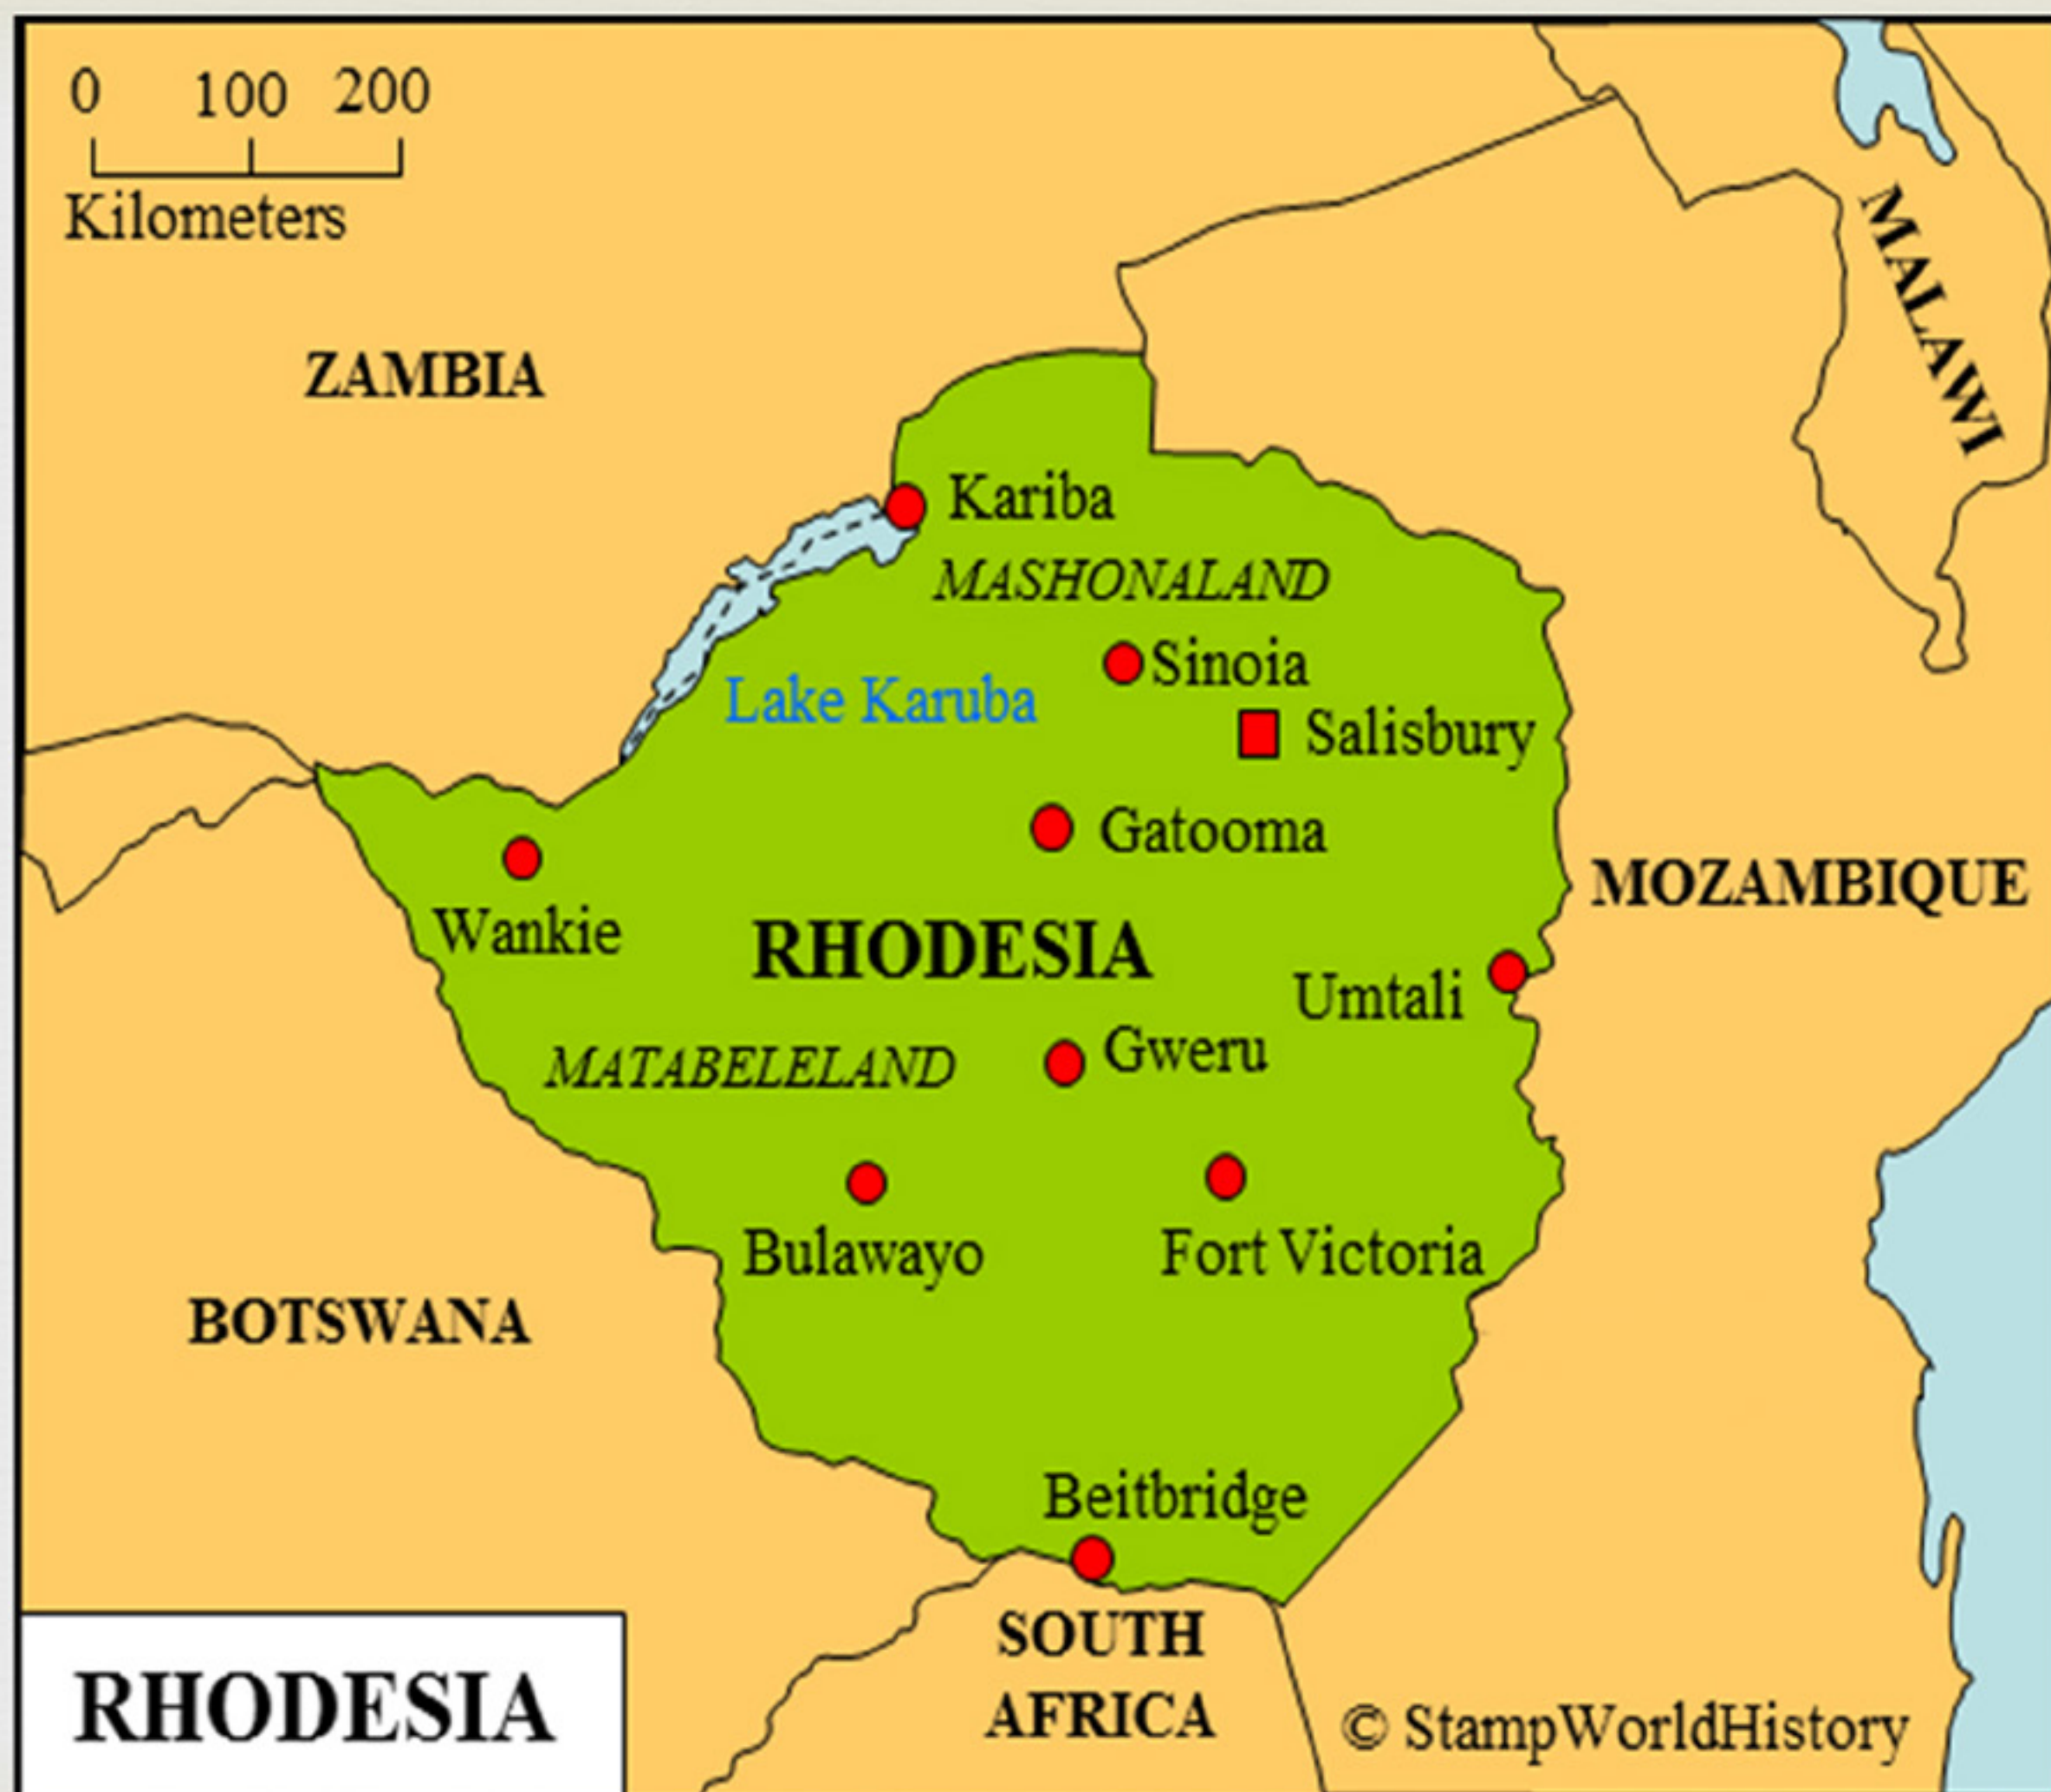





GETTY IMAGES



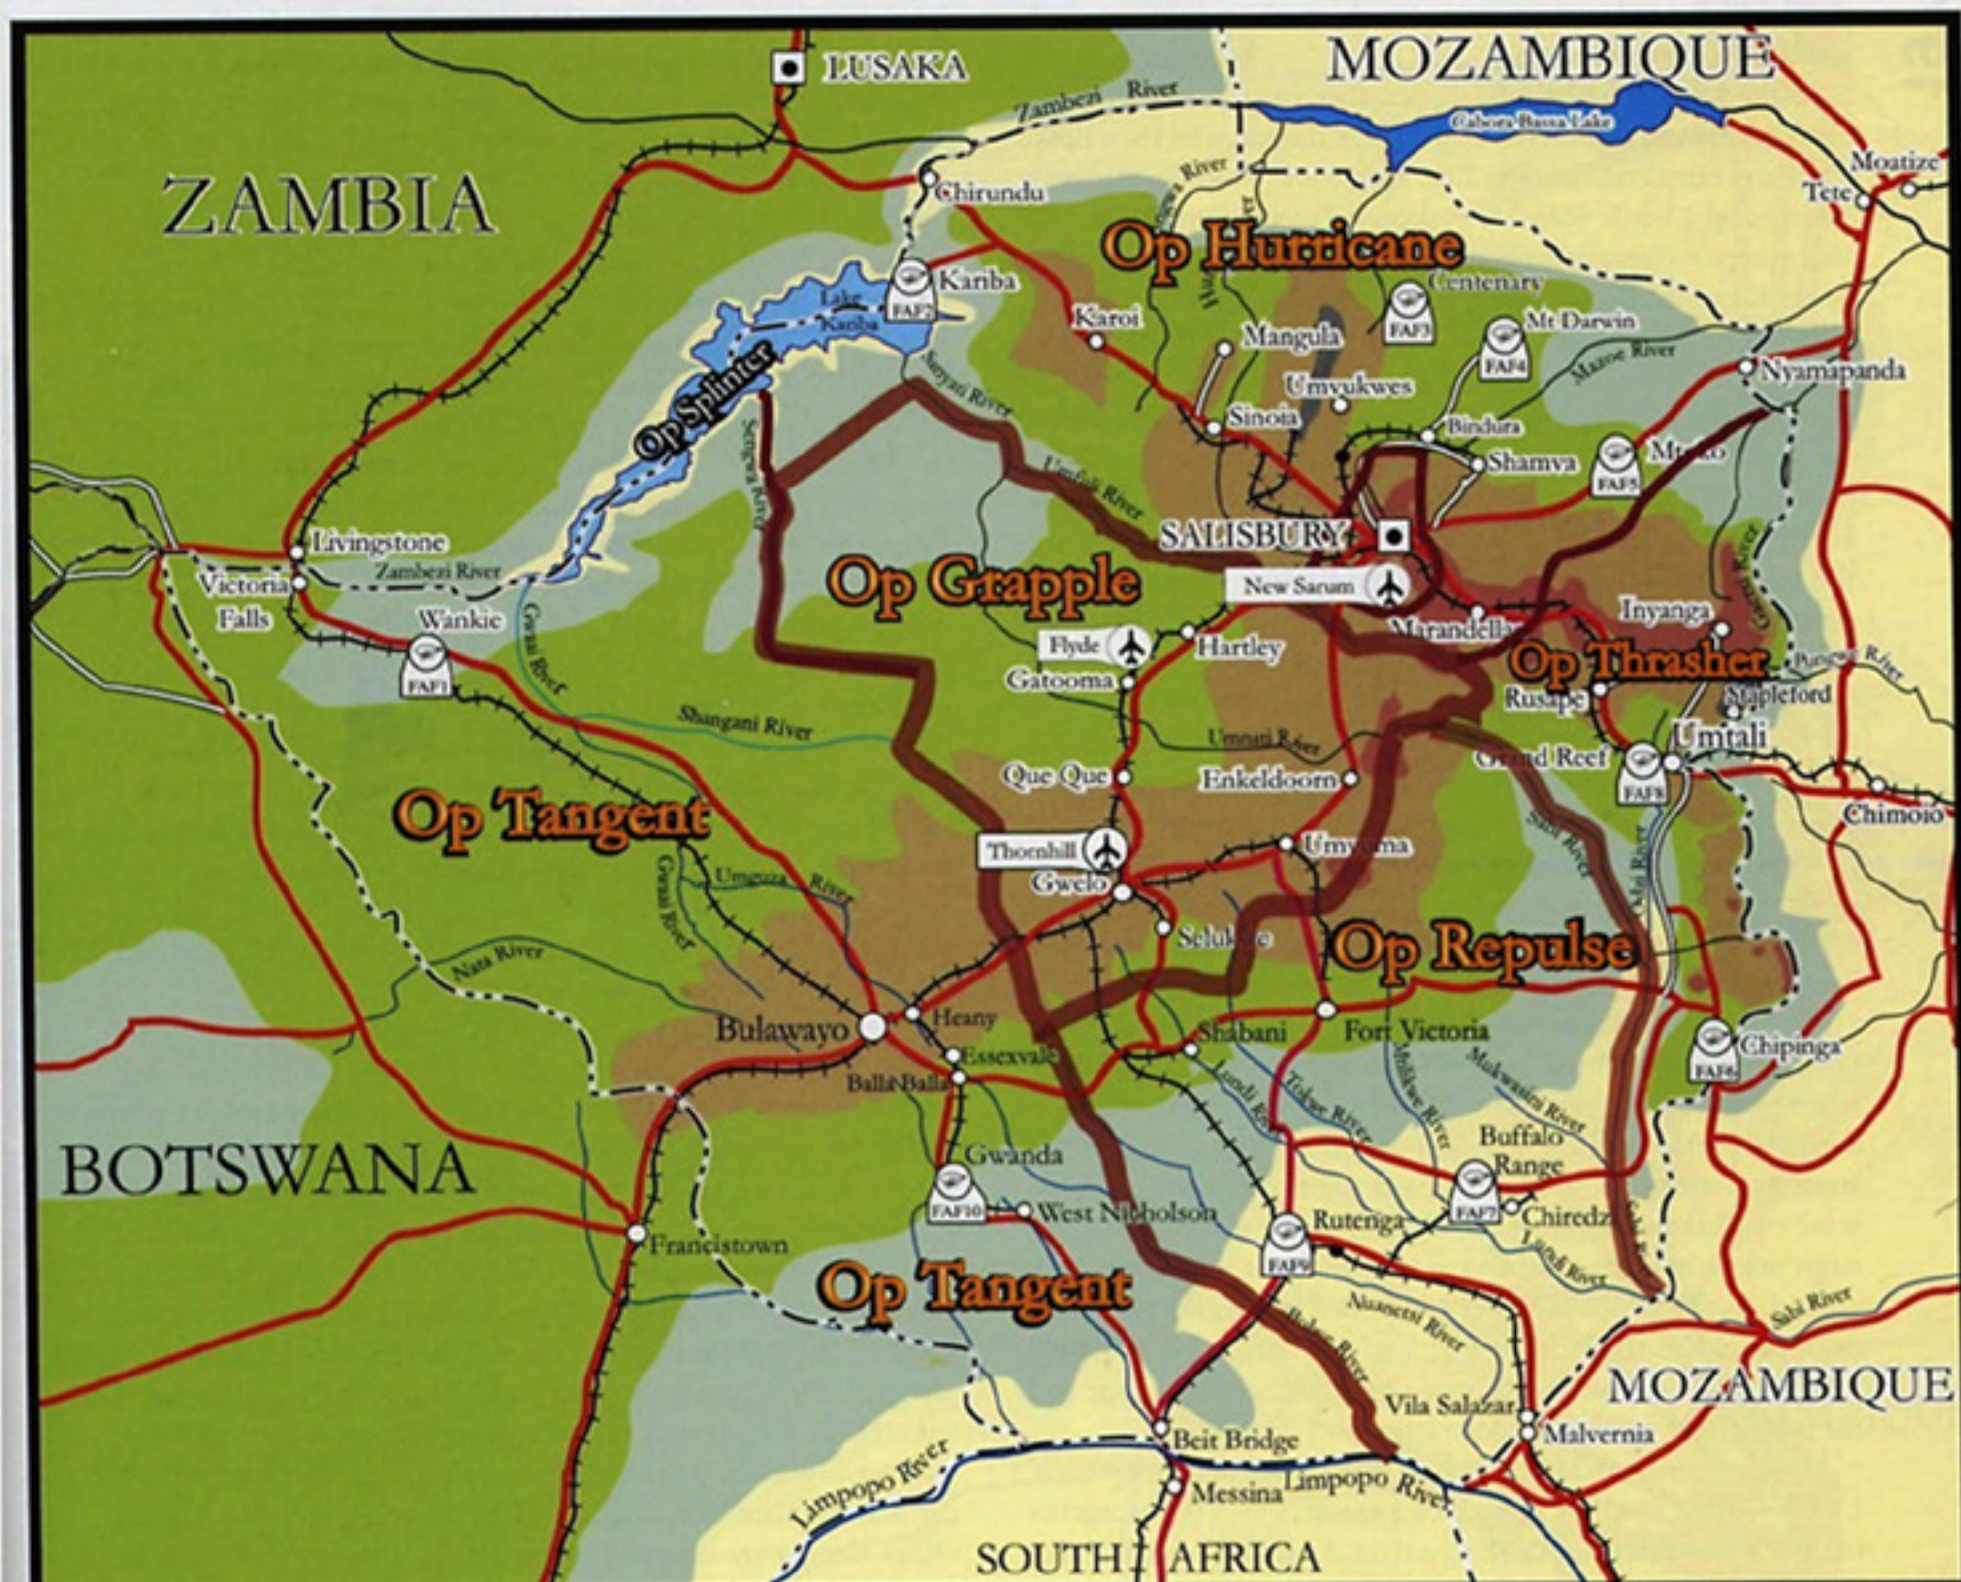

-  = Rhodesian Operational Areas
-  = Forward Airfield
-  = Rhodesian Air Force Base

Rhodesian Security Forces, Operational Boundaries

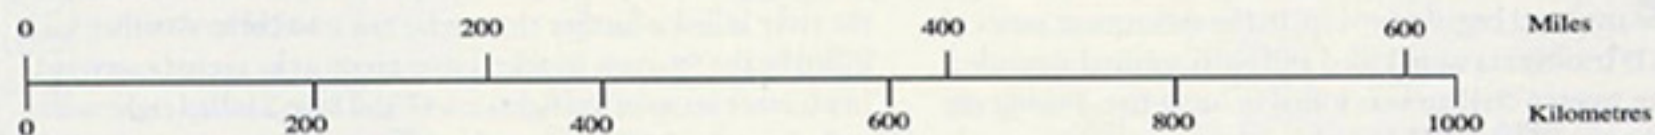







9 Celebrating the 500th meeting of OCC, the Operations Co-ordinating Committee, in June 1976, complete with birthday cake. Seated (*left to right*): Walls (Army), Sherren (Police), Mussell and McLaren (Air force), Flower (Intelligence).

Rhodesian Corps of Signals (1964 – 1979)

















circa 1972



Horace Dainty

David Larsen

RACAL

a name to communicate!




TR2B
Solid state SSB Manpack
25W PEP 12/24 Channels
2-8 MHz Long range




A17 Series
Mobile Antennas



TR3B
Fixed/mobile SSB Radiotelephone
25W PEP 10 Channels 2-8 MHz
Solid State

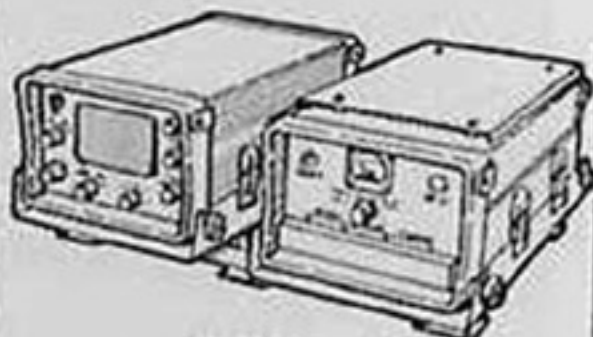

RT422B
Fixed/mobile SSB Radiotelephone
Solid State plus 3 tubes
125W PEP 4 Channels 2-16 MHz

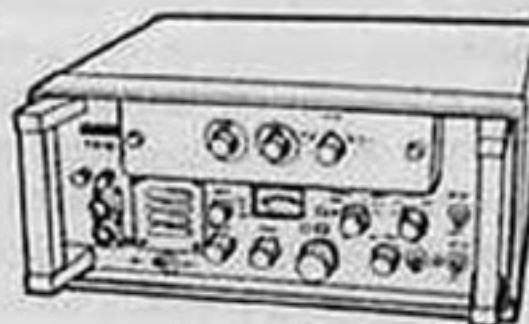

TR15/35/51
100W SSB Solid State Radiotelephones
Synthesiser or up to 50 crystal controlled
channels Fixed or mobile 2-16 MHz

RACAL - A South African company within the world-wide Racal group of companies, supplies a wide range of world-renowned communications and electronic equipment including broadcast HF single-sideband and STORNO VHF/UHF radio telephones, electronic frequency standards, counters and other instruments, and electronic industrial control systems.

RACAL activities embrace - Research and development, manufacture, installation, systems engineering, sales, service, specialised training of personnel.

For long-range communications contact

**RACAL ELECTRONICS
SOUTH AFRICA LIMITED**

140 Struben Street,
P.O. Box 1463, Pretoria
Telephone 21071
Telex 44-754



RACAL-SMD

RT14B

10
9
8
7
6
5
4
3
2
CHANNEL

0
-
+
CLARIFIER

METER
BATT. RE BATT.

KEY TUNE SSB
FUNCTION

A.F. GAIN

SPEAKER
INT. II
EXT. MIC.


PRESS
TO TALK

R.F. GAIN

OFF ON

ANTENNA

SSC ES

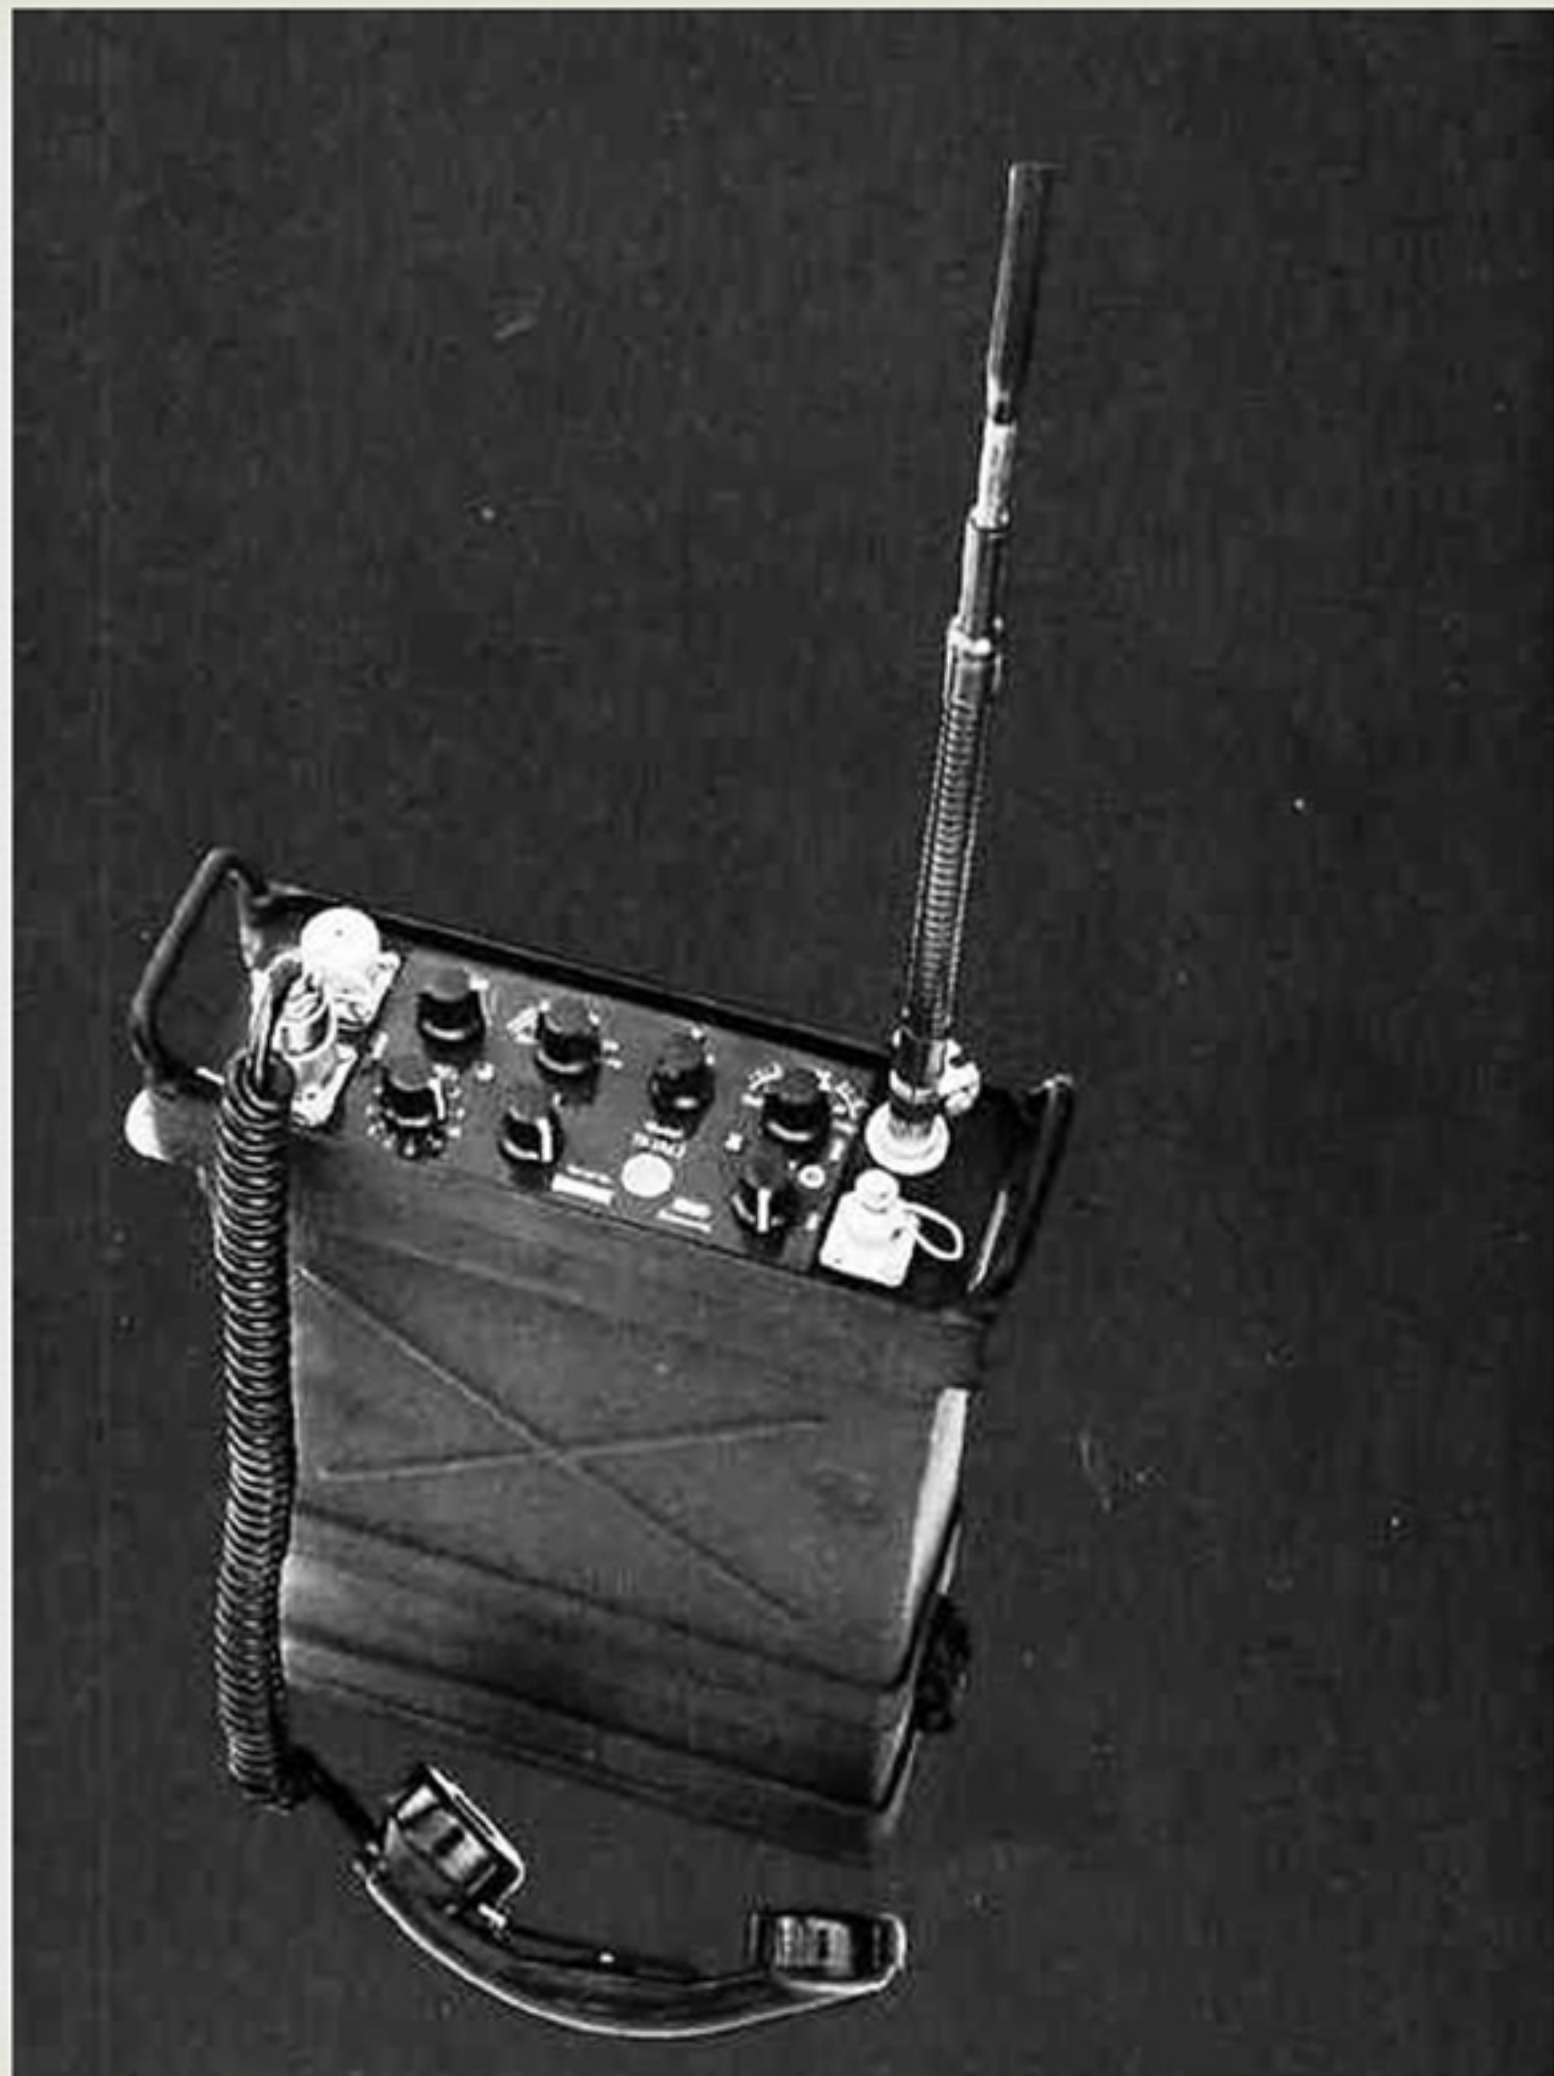













An Effective Multi-band Aerial of Simple Construction

By LOUIS VARNEY, A.M.I.E.E., A.I.L. (G5RV)*

IMMEDIATELY after the war the writer was stationed in North Buckinghamshire until demobilized at the end of 1946 and when amateur transmitting licences were restored in February of that year, had already designed and erected a multi-band aerial in preparation for the word "GO!" Since only an average size back garden was available it was not deemed worth while to construct a beam for the DX bands. Operation on 1.8 and 3.5 Mc/s was an important requisite, but efficient operation on 7, 14 and 28 Mc/s, was also desired. The aerial to be described was evolved and proved to work splendidly from 1.8 to 28 Mc/s. Two versions of it were tested; one using open-wire tuned feeders and the other using a 34 ft. open-wire stub fed at its base by either 72 ohm co-ax or 72 ohm twin-lead. As an alternative to an open-wire stub, 300 ohm ribbon feeder could be used, but would, of course, introduce a certain amount of loss since, on all bands except 1.8 Mc/s, there is a large amplitude standing wave on the stub. The system proved so successful that the writer continued to use it even after his return to Chelmsford where ample space was available for a number of different arrays. It was, in fact, in regular use right up to the summer of 1955 when G5RV departed for Venezuela. Many fellow amateurs who have copied the design are using it with considerable success.

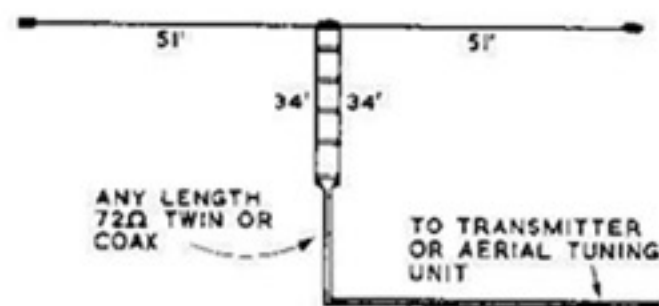


Fig. 1. Construction of the multiband aerial described in the text.

Construction

The aerial consists essentially of a 102 ft. flat-top split in the centre where a Pyrex type insulator is inserted, a 34 ft. open-wire stub (spacing is unimportant) and sufficient length of 72 ohm co-ax or twin-lead feeder to reach the transmitter. Alternatively, open-wire feeder may be employed from the centre of the aerial right back to the transmitter output or a.t.u. The aerial should be supported at the optimum height for the band which is considered most important for DX working; that is, a half or full wavelength above ground. It is perhaps better to arrange this for 14 Mc/s at which frequency the aerial is designed to present a fairly close impedance match to 72 ohm co-ax or twin-lead via the 34 ft. stub which, in this case, acts as a one-to-one impedance transformer, i.e. a half-wave line. Details may be seen in Fig. 1 and Fig. 2.

Operation

On 1.8 Mc/s the transmitter end of the feeder (whatever type is used) is jumpered (i.e. the two feeder wires are

* 184 Gullerwood Road, Chelmsford, Essex

connected together or the inner and outer of the co-ax joined, and the top plus "feeder" is used as a Marconi aerial with a series-tuned coupling circuit and a good earth connection. Despite its relatively small effective height at this frequency, the aerial performs remarkably well and with 10 watts all the British Isles and several European countries were worked regularly.

On the 3.5 Mc/s band, the electrical centre of the aerial commences at about 15 ft. down the centre stub (in other words, the middle 30 ft. of the dipole is folded up). Despite the fact that the remaining 15 ft. length of stub presents a reactive termination to the 72 ohm feeder, no difficulty was found in loading the system easily on this band and results were most satisfactory. WAC was made on 3.5 Mc/s c.w. with 75 watts input while phone contacts were made with many European countries.

The aerial functions as two half-waves in phase on 7 Mc/s with a portion "folded" at the centre. Again, although the 72 ohm feeder sees a somewhat reactive termination it loads perfectly satisfactorily and the system radiates most effectively.

At 14 Mc/s the aerial really comes into its own. On this band it functions as a three half-wavelength aerial with a very effective all-round low-angle polar diagram which is excellent for DX. Since the impedance at the centre is about 100 ohms, a satisfactory match to the 72 ohm feeder is obtained via the 34 ft. of half-wave stub. The DX results obtained on this band particularly, surpassed the results obtained with most normal 14 Mc/s radiators except, of course, a rotary beam. Between 1946 and 1955 the writer amassed a total of 227 countries worked, mostly on 14 Mc/s, mostly with the aerial described here. By making the height a half-wave or a full wave above ground at 14 Mc/s and then raising and lowering the aerial a bit at a time while observing the standing-wave ratio on the 72 ohm twin-lead or co-ax feeder by means of a s.w.r. bridge, an excellent impedance match may be obtained on this band.

On 21 Mc/s, the aerial works as a slightly extended two-wavelength system or, more properly speaking, two full waves in phase and is capable of good results, especially when using tuned feeders thus avoiding any mis-match loss. On 28 Mc/s it consists of two one-and-a-half wavelength in-line aerials fed in phase. Here again, results are better with a tuned feeder to minimize losses although it works satisfactorily with the 34 ft. stub and 72 ohm feeder.

When using tuned feeders, it is recommended that a suitable aerial tuning unit be employed as shown in Fig. 2. The feeder taps should be adjusted experimentally to obtain

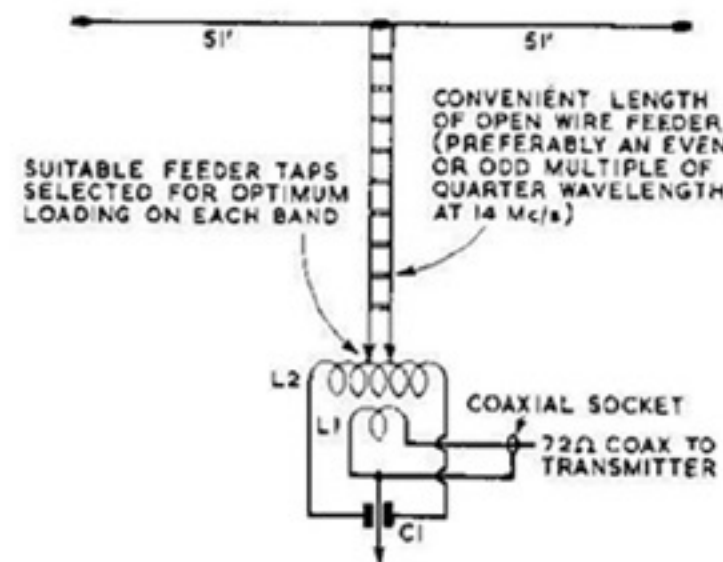


Fig. 2. Multiband aerial with tuned feeders.



Lt Col R.T.O. Tilly, D Sigs/C Rh Sigs 1976 -78 flanked by Maj Gen A.L.C. Maclean, Chief of Staff
and Maj H.C. JAABACK, c rH sIGS 1978 -80